

STANDARD PERFORMANCE

UGV[®]



- 2LE** - COMPACT MODEL
- 2LM** - METERING FLOW
- MDDV** - FLOW CONTROL WITH MANUAL SHUT-OFF VALVE
- 2LD** - STANDARD FLOW
- HM** - LEGACY SERIES
- HMC** - COMPACT INLINE



 **HAM-LET**[®]
Group

2LE SERIES COMPACT MODEL

Metal Diaphragm Valves

Compact models from the Ultra Clean Valve series are made according to UHP specifications.

These models come with end connections in 1/4", as a standard.

These valves are for applications where a minimum footprint is a requirement.


- Compact designs for minimum footprint.
- Electropolished surfaces
- Forged body



For details, please contact one of our field representatives.

STANDARD CONFIGURATION DIMENSIONS - mm

Part Number/ep	Size	End Connection	A	B	C	D	E	F	G	I	J	K	M
2LES4Q-W	1/4	Extended Butt Weld	11	(52)	30	24.5	(4)	17	47			17	
2LEA4R-BV	1/4	Male HTC®	11	(54)	30	24.5	(4)	17		26	45	17	
2LES4C-FV	1/4	Swivel Female HTC®	11	(54)	32					66		17	1/8"

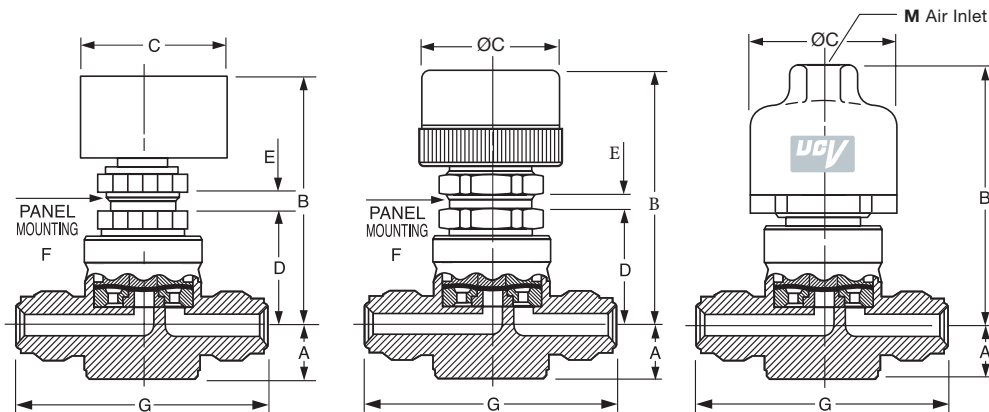


SPECIFICATIONS

Size	Design Pressure	Burst pressure	Proof pressure	Temp.	Cv	Leak Rates	
						Inboard	Across Seat
1/4	1MPa (150 psi)	31MPa (4500 psi)	1.5MPa (225 psi)	-10 to 60°C (PCTFE) -10 to 150°C (PI)	0.1	3X10 ⁻¹² pa•m³/sec Helium	3X10 ⁻¹⁰ pa•m³/sec Helium

STRUCTURE

Item No.	Parts	Material
1	Body	Stainless steel, 316L Var or Vim/Var (1)
2	Seat	PCTFE/PI (Polyimide)
3	Seat Holder	Stainless steel, 316L Var or Vim/Var (1)
4	Diaphragm	Co-Cr-Ni Alloy
5	Act. Button	304 Stainless Steel
6	Act. Button Holder	Stainless Steel, ASTM 630 H900
7	Actuation Device	Aluminum

(1) Per SEMI F20-0305

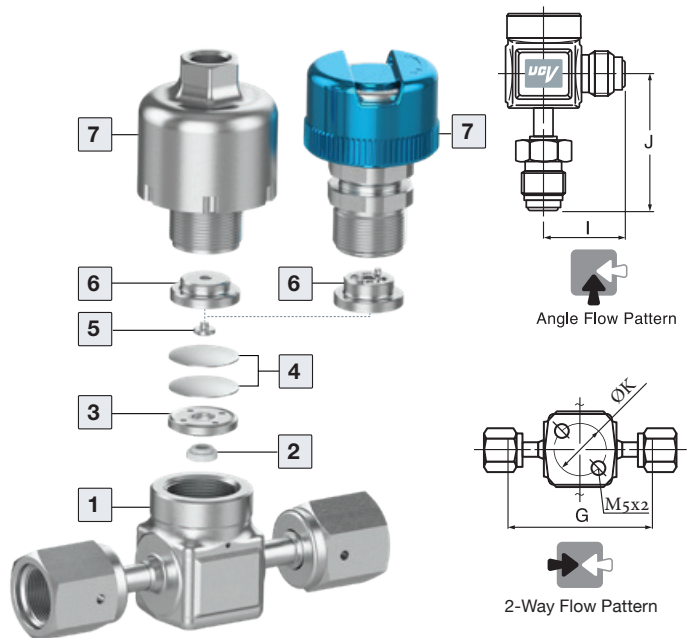

2LM SERIES METERING FLOW

Metal Diaphragm Valves

Flow control models from the Ultra-Clean Valve Series are made according to UHP specifications. These models come with end connections in 1/4", as a standard. Each valve is furnished with a handle-lock set screw with a vernier scale.



- Broad flow-control range of six and a half handle turns.
- A handle-lock set screw on the handle side.
- Electropolished surfaces
- Forged body

As these valves are designed to handle flow control tasks, the valve seat is not fully closed even at the position of division 0 on the vernier scale. Do not operate the handle in the direction in which the valve seat is closed past the position of division 0 on the vernier scale.



STANDARD CONFIGURATION DIMENSIONS - mm

Part Number/ep	Size	End Connection	A	B	C	D	E	F	G	I	J	K
2LMS4V-W	1/4	Extended Butt Weld	11	(98)	23	26	(2.5)	20	47			17
2LMS4V-BW	1/4	Short Butt Weld	11	(98)	23	26	(2.5)	20	44.4			17
2LMA4V-BV	1/4	Male HTC®	11	(98)	23	26	(2.5)	20		26	45	17
2LMS4V-FV	1/4	Swivel Female HTC®	11	(98)	23	26	(2.5)	20	66			17

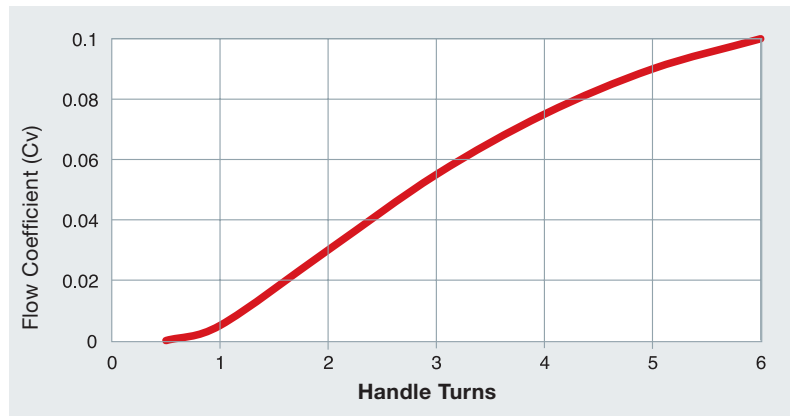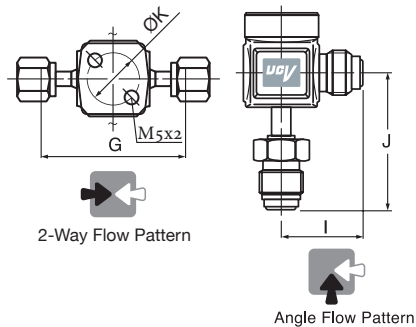


SPECIFICATIONS

Size	Design Pressure	Burst pressure	Proof pressure	Temp.	Cv	Leak Rates	
						Inboard	Across Seat
1/4	1MPa (150 psi)	31MPa (4500 psi)	1.5MPa (225 psi)	-10 to 60°C (PCTFE) -10 to 150°C (PI)	0.1	3X10 ⁻¹² pa•m ³ /sec Helium	Not a Shutoff Valve

STRUCTURE

Item No.	Parts	Material
1	Body	Stainless steel, 316L Var or Vim/Var (1)
2	Seat	PCTFE/PI (Polyimide)
3	Seat Holder	Stainless steel, 316L Var or Vim/Var (1)
4	Diaphragm	Co-Cr-Ni Alloy
5	Act. Button	304 Stainless Steel
6	Act. Button Holder	Stainless Steel, ASTM 630 H900
7	Actuation Device	Aluminum

(1) Per SEMI F20-0305

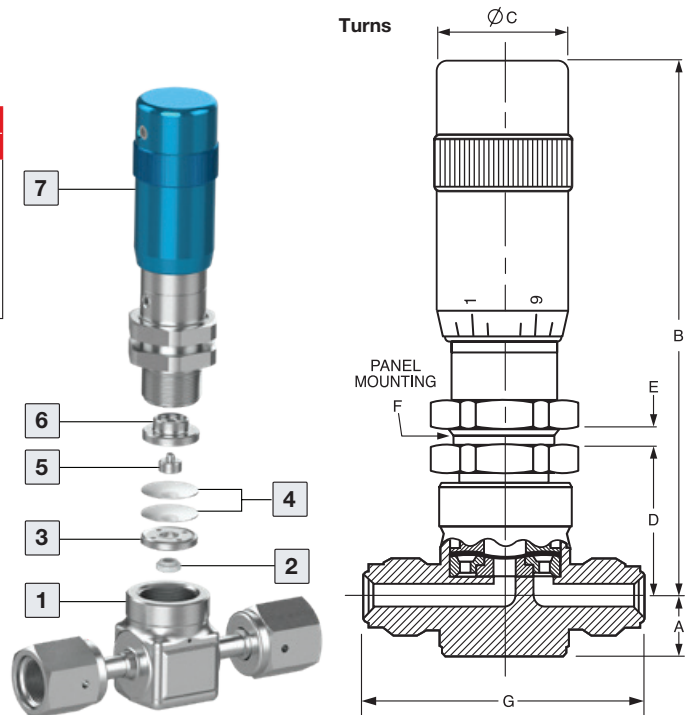

MDDV SERIES

FLOW CONTROL WITH MANUAL SHUT-OFF VALVE



Metering Dual Diaphragm Valve

The Shut-Off Flow Control Diaphragm valve series provides high performance with accurate metering flow and reduces potential leak points. The MDDV series features allows accurate flow control and shut-off operation with the same valve which saves space and installation cost. The flow control capacities can supply accurate Cv=0.1 with up to 6 handle turns. The MDDV series gives full response to the high demand for accurate flow control.



STANDARD CONFIGURATION DIMENSIONS - mm

Part Number/ep	Size	End Connection	A	B	C	D	E	F	G
MDDVS4V-FV	1/4"	Swivel Female Face-Seal	69.5	99.6	23	59.6	45	70.6	29.4
MDDVS4V-MV	1/4"	Swivel Male Face-Seal	69.5	99.6	23	59.6	45	70.6	29.4

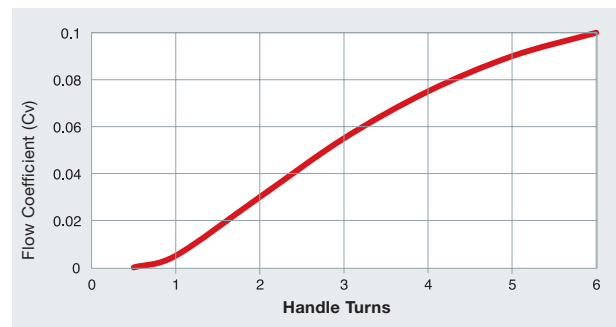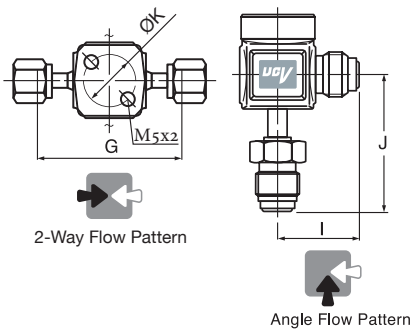


SPECIFICATIONS

Size	Design Pressure	Burst pressure	Proof pressure	Temp.	Cv	Leak Rates	
						Inboard	Across Seat
1/4	1MPa (150 psi)	31MPa (4500 psi)	1.5MPa (225 psi)	-10 to 150°C (Polyimide) -10 to 60°C (PCTFE)	0.1	3X10 ⁻¹¹	3X10 ⁻⁹

STRUCTURE

No.	Parts	Material
1	Flow Control Handle	Aluminum, St. St.
2	Act. Button Holder	SS 17- 4PH
3	Act. Button	SS316
4	Diaphragm	Nickel Alloy
5	Seat Holder	Stainless steel, 316L Var or Vim/Var (1)
6	Seat	PCTFE
7	body	Stainless steel, 316L Var or Vim/Var (1)
8	Seat	PCTFE
9	Seat Holder	Stainless steel, 316L Var or Vim/Var (1)
10	Diaphragm	Nickel Alloy
11	Handle and Strem Assembl	Aluminum, St. St.

(1) Per SEMI F20-0305

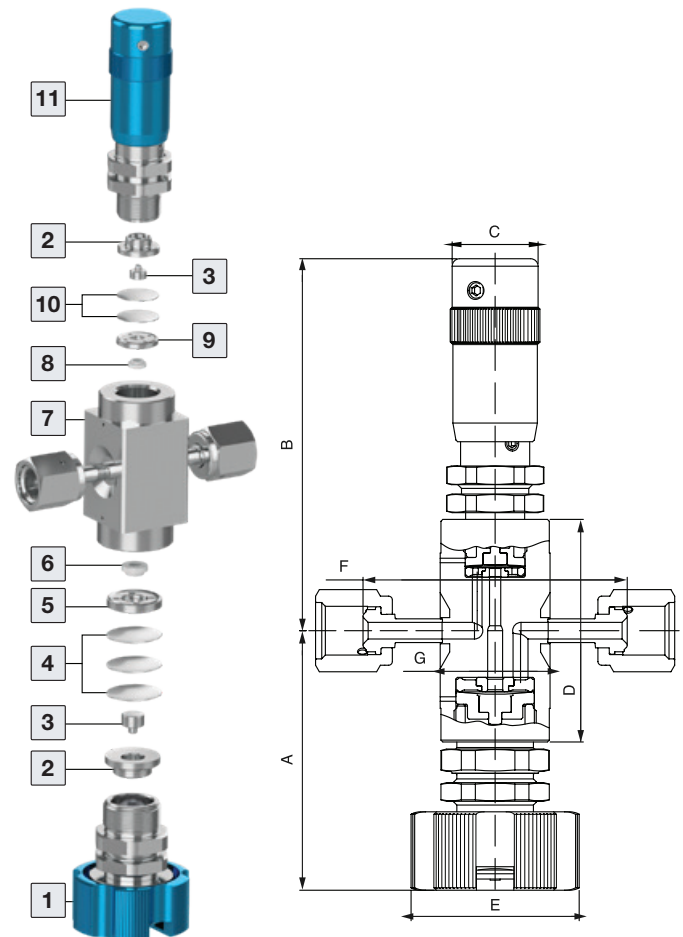

2LD SERIES STANDARD FLOW

Metal Diaphragm Valves

Standard models from the Ultra-Clean Valve series are made according to UHP specifications.

This model comes with end connections in three sizes 1/4", 3/8" & 1/2" as a standard.




This valve comfortably fits into high-flow applications.

- Unique seat structure offers superb leak performance.
- Compact designs for a minimum foot-print.
- Electropolished surfaces
- Forged body



STANDARD CONFIGURATION DIMENSIONS - mm

Part Number/ep	Size	End Connection	A	B	C	D	E	F	G	H	I	J	K	M
2LDA4R-BV	1/4	Male HTC®	11	(63)	45	29	(4)	23	58	25	29	45	25	
2LDS4C-W	1/4	Extended Butt Weld	11	(65)	46				89				25	1/8"
2LDS4C-BW	1/4	Short Butt Weld	11	(65)	46				44.4				25	1/8"
2LDS6R-W	3/8	Extended Butt Weld	17.5	(67.5)	45	32.5	(4)	23	105	38			28	
2LDS8C-FV	1/2	Female HTC®	17.5	(73.5)	56				100				28	1/8"
2LDS8C-W	1/2	Extended Butt Weld	17.5	(73.5)	56				105				28	1/8"

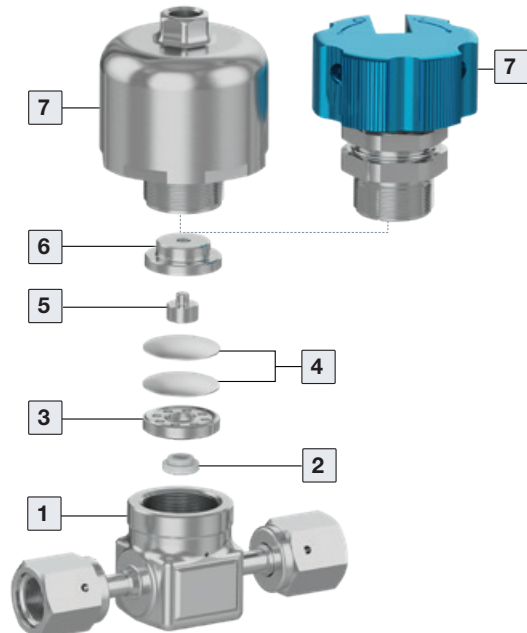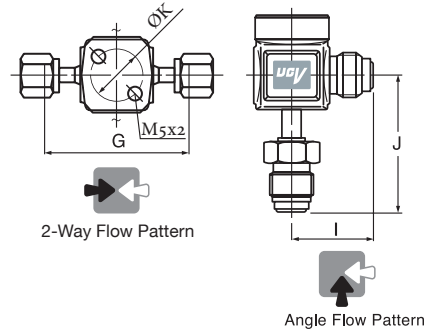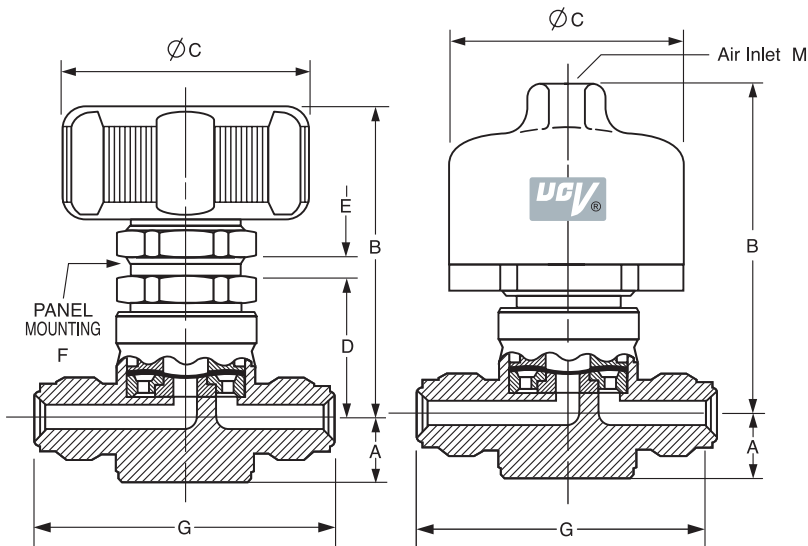

SPECIFICATIONS

Size	Design Pressure	Burst pressure	Proof pressure	Temp.	Cv	Leak Rates	
						Inboard	Across Seat
1/4	1MPa (150 psi)	31MPa (4500 psi)	1.5MPa (225 psi)	-10 to 60°C (PCTFE)	0.3	3X10 ⁻¹² pa•m³/sec Helium	3X10 ⁻¹⁰ pa•m³/sec Helium
-10 to 150°C (PI)							
0.7							
1/2					0.7		

STRUCTURE

Item No.	Parts	Material
1	Body	Stainless steel, 316L Var or Vim/Var ⁽¹⁾
2	Seat	PCTFE/PI (Polyimide)
3	Seat Holder	Stainless steel, 316L Var or Vim/Var ⁽¹⁾
4	Diaphragm	Co-Cr-Ni Alloy
5	Act. Button	304 Stainless Steel
6	Act. Button Holder	Stainless Steel, ASTM 630 H900
7	Actuation Device	Aluminum

(1) Per SEMI F20-0305

ORDERING INFORMATION - STANDARD PERFORMANCE

Valve Description Example:

2LD S 4 C - BV - P

Valve Series	
2LE	- Compact
2LM	- Flow Control
2LD	- Standard
MDDV	- Flow Control Shut Off Valve

Valve Type	
S	- 2-Port Valve (Straight)
A	- 2-Port Valve (Angle)

Body Size	
4	- 1/4"
6	- 3/8**
8	- 1/2"





End Connection	
BV	- Male Face Seal*
V	- Male Face Seal for EV/EVH series*
MV	- Swivel Male Face Seal*
FV	- Swivel Female Face Seal*
W	- Extended Butt Weld
BW	- Short Butt Weld
BI	- LET-LOK®

* For 1/2", 1/4" End connections only

Actuation Device	
C	- Air Operated N.C
O	- Air Operated N.O
R	- Round Handle
Q	- Oval Handle 1/4 turn
V	- Vernier Handle

Feature	
P	- Polyimide
SD	- Safe Device
LD	- Lock Device
ISLT	- LOTO Device

Blue Handle is standard. For other colors contact your local HAM-LET representative.



- Standard seat: PCTFE.
- For valves that are made of bar stock.

For your convenience, port conversion of old HMJ valves to current HM series:
A = 30 | B = 35 | C = 34 | D = 31 | E = 32 | F = 33

Warning! For your safety

The system designer and user have the sole responsibility for selecting products suitable for their special application requirements, ensuring their safe and trouble-free installation, operation, and maintenance. Application details, material compatibility and product ratings should all be considered for each selected product. Improper selection, installation or use of products can cause property damage or personal injury.

HM SERIES LEGACY SERIES MANUAL VALVES

The manually operated Ultra-Clean Diaphragm Valves are for medium and low-pressure applications. The HM series is designed and manufactured per SEMI F-20 material specifications. The valves include a flexible port design with butt weld and face-seal end connections.



STRUCTURE

Item No.	Part No.	Material
1*	Body	**Stainless steel, 316L Var or Vim/Var ⁽¹⁾
2*	Seat	**PCTFE, Polyimide
3*	Seat Holder	**Stainless steel, 316L Var or Vim/Var ⁽¹⁾
4*	Diaphragm	Co-Cr-Ni Alloy
5	Act. Button	Stainless steel, AISI 304, ball AISI 440C
6	Act. Button Holder	Stainless steel, ASTM 630 H900
7	Handle & Stem Assembly	A6061T6, ASTM 630 H900

*Wetted parts ** Standard material

⁽¹⁾ Per SEMI F20-0305



PANEL MOUNTING

Each manual valve has an upper panel mounting as well as bottom mounting, as a standard.


The upper panel mounting has a stainless steel nut, which requires a minimum width of 0.04" for panel mounting.

For multi-port valves, select the End Connection for each port, starting with port A as shown below.


Top View

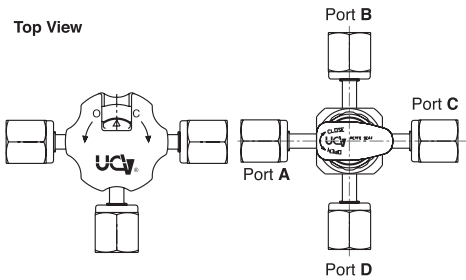

Male Face-Seal Ends



Butt Weld Ends

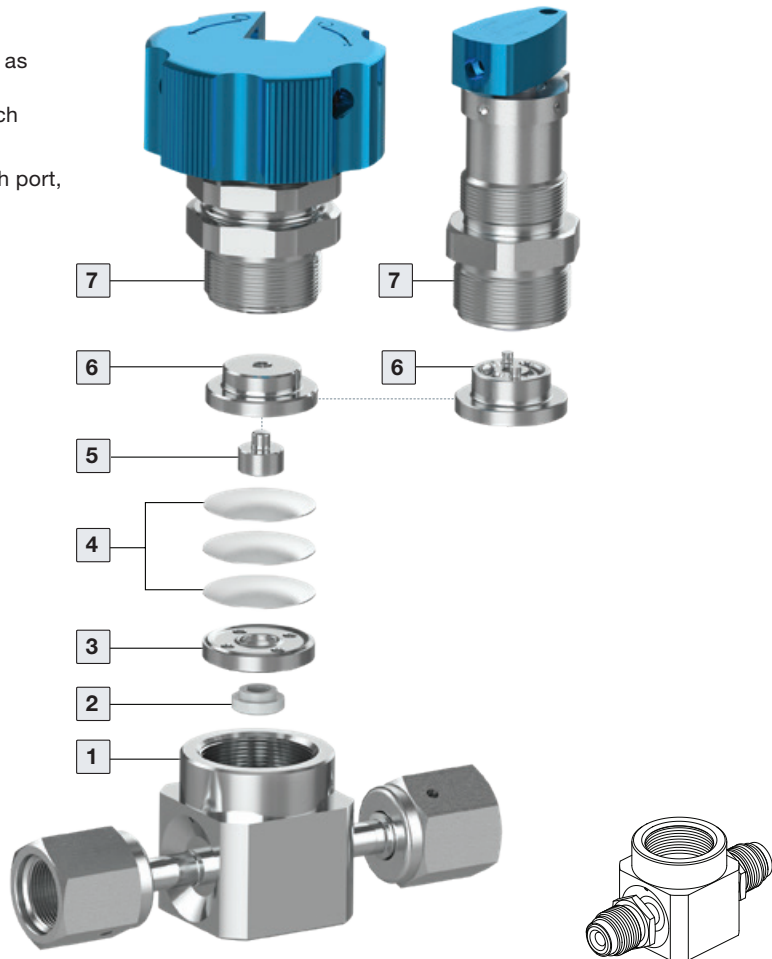

Swivel Female Face-Seal Ends

Swivel Male Face-Seal Ends


HM SERIES LEGACY SERIES MANUAL VALVES

UCV SPECIFICATIONS


Structure	Direct-seal metal-diaphragm valve without seal packing Manually operated	
	1/4	1/2
Design Pressure	Vacuum to 300 psi (20 bar)	Vacuum to 150 psi (10 bar)
Burst Pressure	4500 psi (310 bar)	
Proof Pressure	450 psi (31 bar)	
Temperature: Standard	14 to 140°F, -10 to 60°C (PCTFE Seat)	14 to 140°F, -10 to 60°C (PCTFE Seat)
Available	14 to 302°F, -10 to 150°C (*Polyimide Seat)	14 to 302°F, -10 to 150°C (*Polyimide Seat)
Leakage: Inboard Leakage	≤ 3x10 ⁻¹¹ atm cc He/sec	≤ 3x10 ⁻¹¹ atm cc He/sec
across the seat	≤ 1x10 ⁻⁹ atm cc He/sec	≤ 1x10 ⁻⁹ atm cc He/sec
Particle	No particle detected above 0.1µm.	No particle detected above 0.1µm
Operated	Round handle 3/4 turn Oval handle 1/4 turn	Round handle 3/4 turn, Pneumatic Normally open(n.o), Normally close(n.c)
Connections	Face seal or tube weld	Face seal or tube weld
CV value - Low Pressure	0.3	0.7
Valve Lift	0.024", 0.6 mm	0.024", 0.6 mm
Direction	2 port straight, 2 port L, 3 port, 4 port	2 port straight
Surface Finish Ra (Ave)-Standard	5µin	5µin
Surface Finish Ra (Max)-Standard	10µin	10µin

*Used with Fluorocarbon FKM O-ring
LP-Low pressure


NITROGEN FLOW FOR LOW-PRESSURE VALVE-CV 0.3

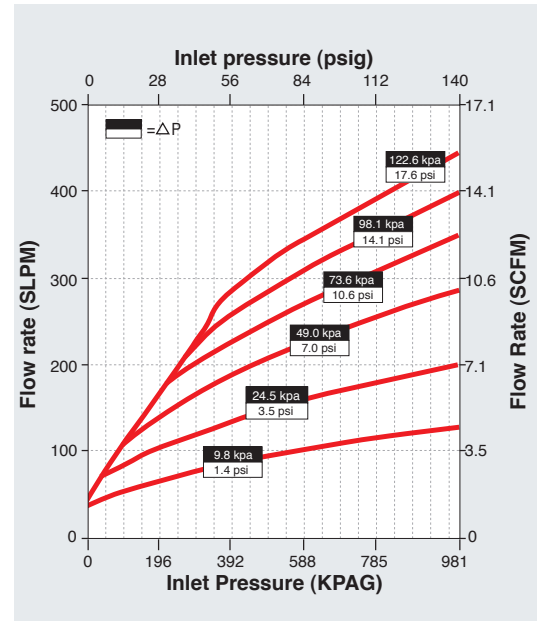

Round Handle

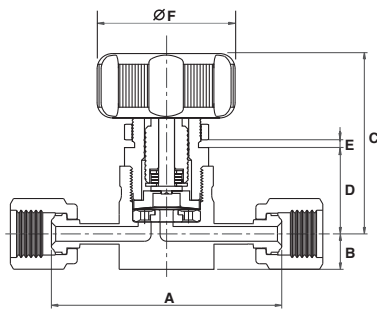

Oval Handle

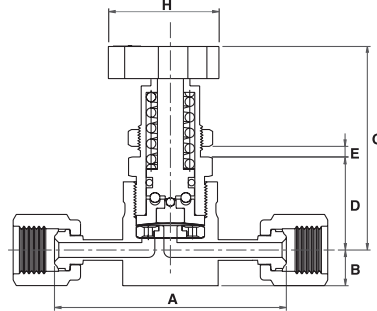

VALVE DIMENSIONS- inch, mm

Size	Connection	A		B		C		D		E*		F		G		H	
		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
1/4	Swivel Female Face-Seal	2.78	70.6	0.44	11.0	2.48	63.0	1.14	29.0	0.04	1.00	1.77	45.0	2.68	68.0	1.34	34.0
1/4	Male Face-Seal	2.30	58.4	0.44	11.0	2.48	63.0	1.14	29.0	0.04	1.00	1.77	45.0	2.68	68.0	1.34	34.0
1/4	Swivel Male Face-Seal	2.78	70.6	0.44	11.0	2.48	63.0	1.14	29.0	0.04	1.00	1.77	45.0	2.68	68.0	1.34	34.0
1/4	Butt Weld	1.75	44.4	0.44	11.0	2.48	63.0	1.14	29.0	0.04	1.00	1.77	45.0	2.68	68.0	1.34	34.0

Dimensions are for reference only and are subject to change.

*Minimum height for panel

HM SERIES LEGACY SERIES AIR-OPERATED VALVES

The pneumatically operated Ultra-Clean Diaphragm Valve is for high and low-pressure applications. The HM series is designed and manufactured per SEMI F-20 material specifications, and it offers a flexible port design with butt-weld and face-seal end connections.



UCV SPECIFICATIONS

Structure	Direct-seal metal-diaphragm valve without seal packing Pneumatically operated	
	1/4	1/2
Pressure	Vacuum to 300 psi (20 bar)	Vacuum to 150 psi (10 bar)
Burst Pressure	4500 psi (310 bar)	
Proof Pressure	225 psi (15.5 bar)	
Temperature: Standard	14 to 140°F, -10 to 60°C (PCTFE Seat)	14 to 140°F, -10 to 60°C (PCTFE Seat)
Available	14 to 302°F, -10 to 150°C (*Polyimide Seat)	14 to 356°F, -10 to 180°C (*Polyimide Seat) 14 to 302°F, -10 to 150°C (*VESPEL Seat)
Leakage: Inboard Leakage	≤ 3x10 ⁻¹¹ atm cc He/sec	≤ 3x10 ⁻¹¹ atm cc He/sec
across the seat	≤ 1x10 ⁻⁹ atm cc He/sec	≤ 1x10 ⁻⁹ atm cc He/sec
Particle	No particle detected above 0.1µm.	No particle detected above 0.1µm
Operated	Pneumatic, NC/NO**	Pneumatic, NC/NO**
Connections	Face seal or tube weld	Face seal or tube weld
CV value - Low Pressure	0.3	0.7
Valve Lift	0.6mm (0.024")	0.6mm (0.024")
Direction	2-port straight, 2-port L, 3-port, 4-port	2-port straight
Surface Finish Ra (Ave)-Standard	5µin	5µin
Surface Finish Ra (Max)-Standard	10µin	10µin
Air Supply	60-90 psig , 4 - 6 bar	60-90 psig , 4 - 6 bar
Air Connection	1/8" NPT	1/8" NPT

*Used with Fluorocarbon FKM O-ring

**NC-Normally Closed
NO-Normally Open



LP-Low pressure

STRUCTURE


Item No.	Part No.	Material
1*	Body	**Stainless steel, 316L Var or Vim/Var ⁽¹⁾
2*	Seat	**PCTFE, Polyimide
3*	Seat Holder	**Stainless steel, 316L Var or Vim/Var ⁽¹⁾
4*	Diaphragm	Co-Cr-Ni Alloy
5	Act. Button	Stainless steel, AISI 304, ball AISI 440C
6	Act. Button Holder	Stainless steel, ASTM 630 H900
7	Actuator Assembly	A6061T6

*Wetted parts

** Standard material

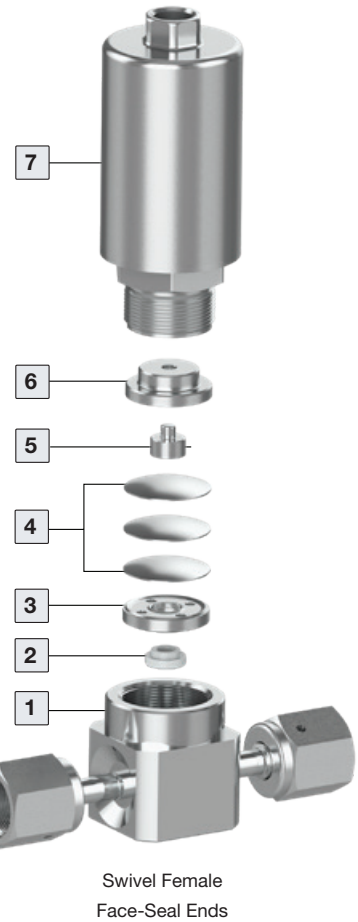


Butt Weld
Ends




Male Face-
Seal Ends

⁽¹⁾ Per SEMI F20-0305



Swivel Male
Face-Seal Ends

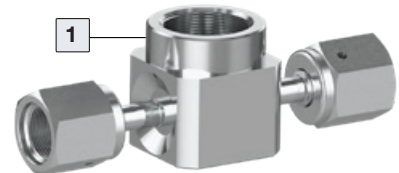

Swivel Female
Face-Seal Ends

HM SERIES LEGACY SERIES AIR OPERATED VALVES

VALVE DIMENSIONS

Size	Connection	A		B		C		D		E*		F	
		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
1/4	Swivel Female Face-Seal	2.78	70.6	0.44	11.0	1.16	29.4	1.16	29.4	1.00	25.4	1.40	35.3
1/4	Male Face-Seal	2.30	58.4	0.44	11.0	1.16	29.4	1.16	29.4	1.00	25.4	1.15	29.2
1/4	Swivel Male Face-Seal	2.78	70.6	0.44	11.0	1.16	29.4	1.16	29.4	1.00	25.4	1.40	35.3
1/4	Butt Weld	1.75	44.4	0.44	11.0	1.16	29.4	1.16	29.4	1.00	25.4	0.87	22.2

ACTUATOR DIMENSIONS - inch (mm)

Actuator type	I	øJ	K	Effective Area	Output Force
Low Pressure	2.86 (72.7)	1.33 (34)	3.29 (83.7)	1.58 in ²	550 psig
High Pressure	3.50 (89)	1.57 (40)	3.93 (100)	1.58 in ²	550 psig
AO-Position switch			3.78 (96)		

STANDARD PANEL MOUNTING FOR TWO-PORT STRAIGHT VALVE

- Optional, four threaded holes (two as standard).
- All the other valve types have standard four threaded holes. According to SEMATECH
- 96063137-ENG.





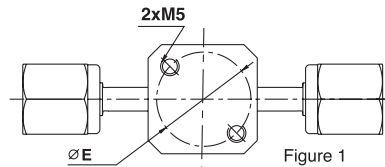


Figure 1
The M5 threaded mounting holes will accept 10-32 screws.

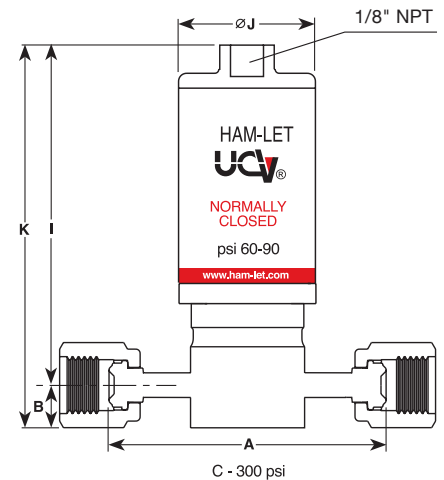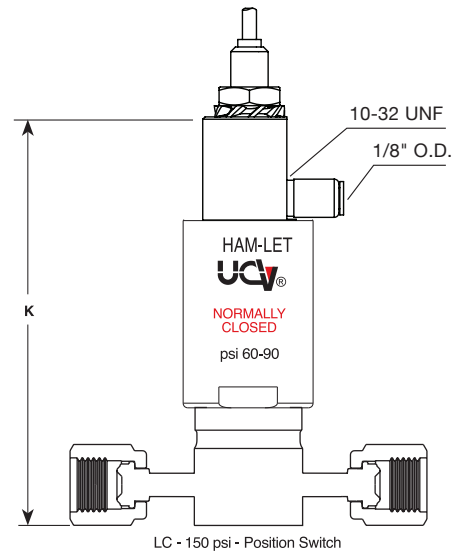

Top View

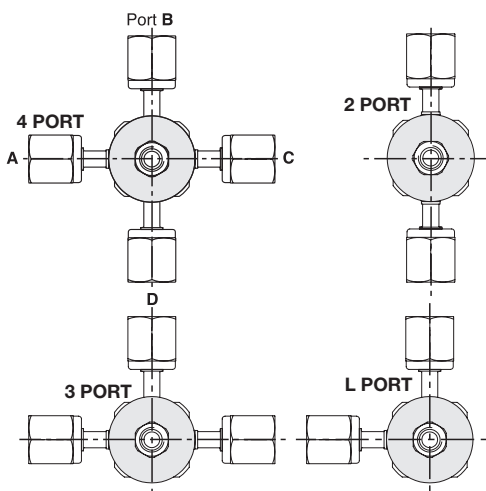

* The dimensions apply to pneumatic and manual valves. Dimensions are for reference only and are subject to change.

THE UCV HM SERIES SPECIFICATIONS

MATERIAL

UCV Series Valves meet the chemical composition and the mechanical properties of Stainless Steel 316L, according to the ASTM A276 specification. Chemical Composition: The body material of the UCV Series complies with SEMI F20 - the sulfur content is lower or equal to 0.01 percent.

MECHANICAL SIZE - DIMENSIONAL SPECIFICATION

UCV Series Valves meet the end-to-end length and overall envelope and comply with SEMATECH Technology Transfer 96063137-ENG.

PACKAGING

HAM-LET standard for packing the UCV Series Valves is a double bag. The inner bag contains ultra-pure nitrogen. All end fittings, threads and sealing surfaces are protected with a cap to prevent any damage.

ELECTROPOLISHED SURFACES - SURFACE FINISH

UCV Valves meet a surface defect level of maximum of 25 for any location with a maximum average of 15. This test is done in accordance with SEMASPEC 90120401-STD.

UCV Valves meet the Chromium Enhancement ratio of chromium-to-iron ratio of 2:1 and chromium oxide-to-iron oxide ratio of 3:1. This test is done in accordance with SEMASPEC 90120403-STD. UCV Valves meet the oxide layer depth and surface contamination of 20 angstroms after subtraction of the carbon layer. The carbon layer is 10 angstroms.

SURFACE ROUGHNESS

All wetted parts of the UCV Series Valves have an average surface roughness (Ra avg) of 5 micro-inch Ra, and maximum surface roughness (Ra max) of 10 micro-inch Ra, complying with ISO 4288.

HELIUM LEAK TEST

All UCV Series Valves are 100% helium leak tested. Helium-leak tests are performed using a helium-leak detector machine with a sensitivity of 0.1×10^{-12} atm cc He/sec. The standard leak rate tests are listed below.

(Lower leak rates are optional on request)

Maximum Helium (He) leak ratings:

Inboard leak integrity 3×10^{-11} atm cc/sec. Complies with SEMI F1. Leak across the seat 1×10^{-9} atm cc/sec. This test is done in accordance with SEMASPEC 90120391B-STD (held for at least 15 seconds).

PARTICLES

The particles standard for UCV Series Valves is less than 5 particles/ft³ for particles 0.1 μm and 20 particles 0.02 μm for static and dynamic tests, according to SEMASPEC 90120390-STD.

MOISTURE TESTING

The standard moisture level is 20 ppbv H₂O in Nitrogen baseline or less, within 2 hours after 2 ppmv spike for 1 minute at flow rate of 1.5 SLM or less, according to SEMASPEC 90120397-STD.

CLEANING

All CNC machined valve parts are cleaned to ensure that they are free of emulsion composition and residues involved in the machining process.

RELIABILITY

The valves demonstrate a MTTF of more than 1 million cycles for pneumatic valves and more than 100,000 cycles for manual valves, in accordance with SEMASPEC 90120395-STD and 90120390-STD.

ORDERING INFORMATION - HM SERIES

VALVE DESCRIPTION EXAMPLE:

HM
2
1
-
4
V
K
LR
-
BW
4
GF
4
-
LD

Valve Series

HM - UCV Valves

Port Designator

0, 1, 2, 3, 4, 5

Body Material

V - SS316L Var or Vim/Var⁽¹⁾ (Bar Stock) Standard

Actuation Device

LC - Air Operated N.C. 150 psi
 C - Air Operated N.C. 300 psi
 LO - Air Operated N.O. 150 psi
 O - Air Operated N.O. 300 psi
 LR - Round Handle 3/4 turn 300 psi*
 LQ - Oval Handle 1/4 turn 300 psi

* Blue color is a standard

Handle color can be delivered by request.
 NC-Normally close, NO- Normally open.

End Size

4 - 1/4"
 6 - 3/8"*
 8 - 1/2"
 6mm*

* BW, LL End connections only

Valve Type

2 - 2-Port Valve
 3 - 3-Port Valve
 4 - 4-Port Valve

Body Size

4 - 1/4
 8 - 1/2

Seat Material

K - PCTFE
 S* - Polyimide

K Standard, *Available

End Connection

BW - Butt weld
 GF - Swivel female Face-seal**
 GM - Swivel male Face-seal**
 M - Male Face-seal**
 LL - Let-Lok®

Features

LD - Locking Device
 ISLT - LOTO handle
 HB - Hybrid

** 1/4", 1/2" End connection size only

*For limit switch indicator on AOP Valve, contact your local HAM-LET representative

PORT DESIGNATOR - (TOP VIEW)

Valve Configuration	Port Designator	Schematic Flow Chart	Valve Configuration	Port Designator	Schematic Flow Chart	Valve Configuration	Port Designator	Schematic Flow Chart
2 Port Valve HM2	0		3 Port Valve HM3	0		4 Port Valve HM4	0	
	1 L-Port			1			1	
	2 L-Port			2			2	
				3			3	
				4				
				5				

⁽¹⁾ Per SEMI F20-0305


HMC SERIES COMPACT IN-LINE

Metal Diaphragm Valves

- Compact design
- Manual 3/4 turn handle and position indicator (open/close), 300 PSI
- Safety clip; Locking device for manual round 3/4 turn handle
- Pneumatically actuated, Normally Closed and Normally Open version, 150 PSI
- Electropolished surfaces as standard
- Standard panel mounting



Actuation type	End Connection	A	B	C	D	E	G
		mm	mm	mm	mm	mm	mm
Air Operated NC / NO	Butt Weld 1/4	44.4	56.9	32			
	Male HTC 1/4	58.4					
	Let-Lok 1/4	64.7*					
	Female HTC 1/4	70.6					
	Swivel Male HTC 1/4	70.6					
Round 3/4 Turn Handle	Butt Weld 1/4	44.4	51.4	45	11	25.4	29.4
	Male HTC 1/4	58.4					
	Let-Lok 1/4	64.7*					
	Female HTC 1/4	70.6					
	Swivel Male HTC 1/4	70.6					
Oval Directional 1/4 Turn Handle	Butt Weld 1/4	44.4	68	34			
	Male HTC 1/4	58.4					
	Let-Lok 1/4	64.7*					
	Female HTC 1/4	70.6					
	Swivel Male HTC 1/4	70.6					

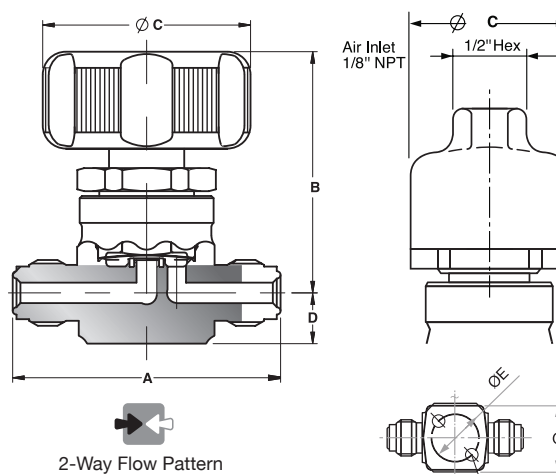


* LET-LOK® configuration length including nuts and ferrules fingers tight

SPECIFICATIONS

Size	Design Pressure	Burst Pressure	Proof Pressure	Temp.	Cv	Leak Rates	
						Inboard	Across Seat
1/4	1MPa (150 psi)	31MPa (4500 psi)	1.5MPa (225 psi)	-10~60°C 14~140°F	0.25	≤ 3 X10 ⁻¹¹ Atm cc/sec Helium	≤ 3 X10 ⁻⁹ Atm cc/sec Helium

STRUCTURE

Item No.	Part No.	Material
1	Body	316L Stainless Steel / SS316L Var or Vim/Var ⁽¹⁾
2	Seat	PCTFE
3	Diaphragm	Co-Cr-Ni Alloy
4	Act. Button Holder	Stainless steel, ASTM 630 H900
5	Act. Button	Stainless steel, AISI 304, ball AISI 440C
6	Handle/Act	Aluminum Anodize

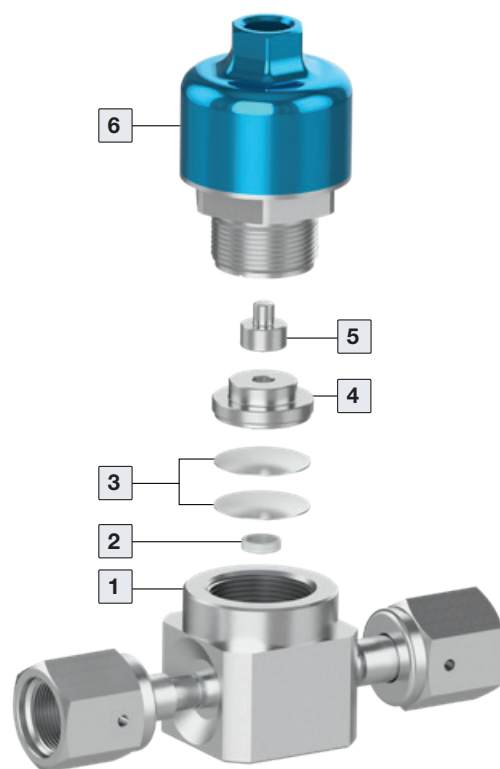

ORDERING INFORMATION - HMC SERIES

VALVE DESCRIPTION EXAMPLE:

THE UCV HM & HMS SERIES SPECIFICATIONS

HMC 20		4	L	K	ER	M4
Valve Type		Body Size	Body Material	Seat Material	Actuation Type	End Connection
2	2-port	4 - 1/4	L - St.St. 316L A - SS316L Var or Vim/Var ⁽¹⁾	K - PCTFE	ER - Round 3/4 turn Handle 300 psi EC - Air operated Normally Close 150 psi EO - Air operated Normally Open 150 psi EQ - Oval Directional 300 psi	M4 - 1/4 Male Face Seal BW4 - 1/4 Tube Butt-Weld LL4 - 1/4 Let-Lok GM4 - 1/4 Swivel Male Face Seal GF4 - 1/4 Swivel Female Face Seal

⁽¹⁾ Per SEMI F20-0305

HMC20 is standard. For other configuration contact HAM-LET customer service

The system designer and user have the sole responsibility for selecting products suitable for their special application requirements, ensuring their safe and trouble-free installation, operation, and maintenance. Application details, material compatibility and product ratings should all be considered for each selected product. Improper selection, installation or use of products can cause property damage or personal injury.