


INTEGRAL-BONNET NEEDLE VALVES

H300U SERIES

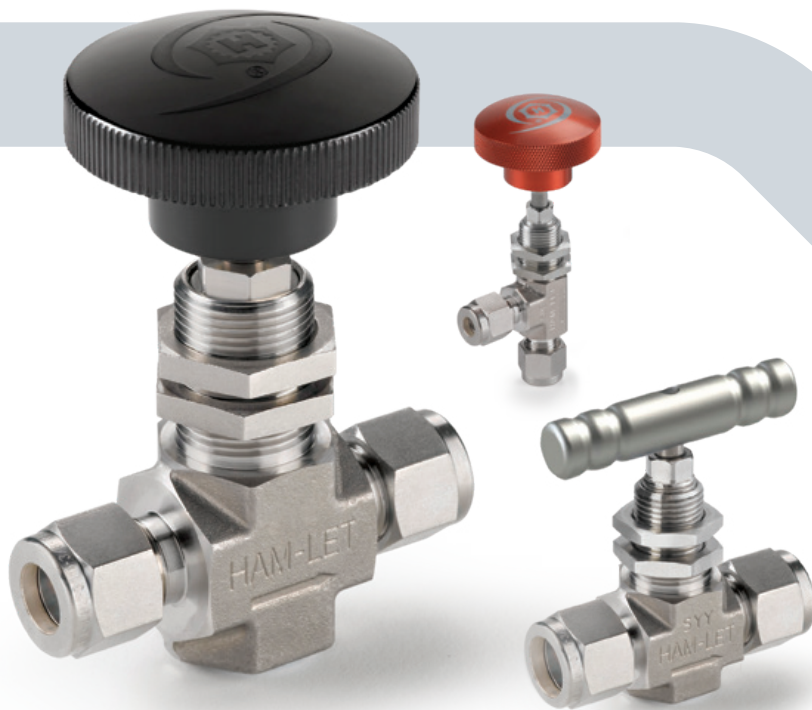


FEATURES

- Certified for ISO 15848-1:2006(E)
- Straight and angle pattern
- Stainless steel or brass body construction
- MAWP 5000 psi (345 bar), MAWT 446°F (230°C)
- Flow coefficient (Cv) 0.09 to 1.8
- Sizes: 1/8" to 3/4" (3mm-12mm)
- Round plastic, round aluminum, and metal bar handles
- Variety of stem types
- Packing bolt for easy panel mounting, no packing disassembling is required
- Chevron stem packing provides lowest operation torques
- Belleville washers to compensate packing wear
- Special synthetic, anti-seize stem lubricant for resistance to high temperature

MATERIAL OF CONSTRUCTION

No.	Component	Qty.	Material
1	Handle	1	Phenolic
2	Set Screw	1	St.St.316
3	Packing Bolt	1	St.St.316
4	Belleville Washer	2	St.St.302
5	*Gland	2	St.St.316
6	Upper Packing	1	PTFE
7	Bottom Packing	1	PTFE
8	A *Regulating Stem	1	St.St.316 with surface treatment
	B *V-Stem	1	St.St.316 with surface treatment
	C *Non-Rotatin Stem	1	St.St.316 with surface treatment
	D *Soft Seat Stem	1	St.St.316 with surface treatment
9	Panel Nut	2	St.St.316
10	*Body	1	St.St.316
	Lubricant		Silicone based

* Wetted parts

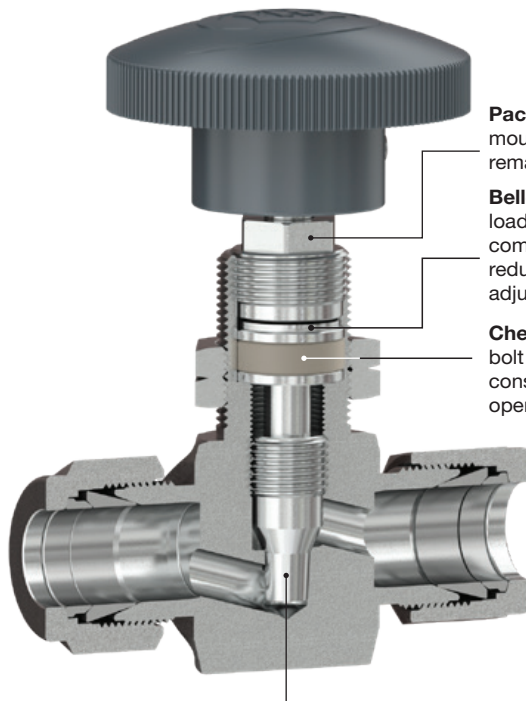


Packing bolt enables easy mounting with the packing remaining untouched

Belleville washers spring-load the stem packing thereby compensating for wear and reducing the need for packing adjustments

Chevron packing reduces packing bolt tightening torque, consequentially reducing the Valve operating torque.

Stem diffusion surface hardening provides the best galling resistance and protection from wear and corrosion.

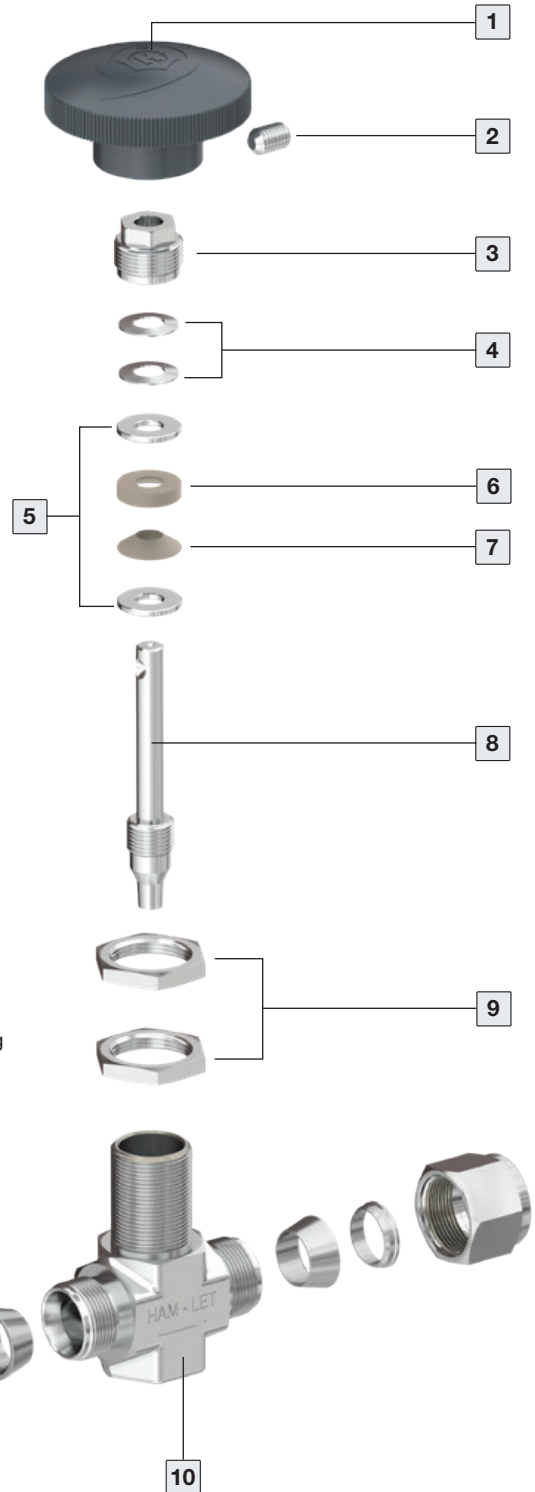

GENERAL

The H-300U Series is an advanced high pressure instrumentation needle valve for shut-off service, its packing bolt design for easy mounting being the best solution for instrumentation panels.


This compact valve enables a relatively high level of flow regulation and long-life service. Special stem surface treatment, based on low temperature carbon diffusion, enables higher surface hardness with improved wear resistance, resistance to system contaminants and low operational torque.

STANDARD CONFIGURATION DIMENSIONS

Basic Ordering Number	Orifice mm (in) S/A	Cv	Connection Size		A		A1		A2		A3		B		C	D	E	F	G	H	T max
			Inlet	Outlet	mm	in	mm	in	mm	in	mm	in	mm	in	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)
H-300	2.0 (0.08)	0.09	3mm LET-LOK®	3mm LET-LOK®	50.8	2.00	25.4	1.00	25.4	1.00	25.4	1.00	33.4	1.31	10.0 (0.39")	7.95 (0.31")	35.1 (1.38") 50* (1.97")	13.0 (0.51")	63.5 (2.50") 56* (2.20")	15.9 (5/8")	10.0 (0.39")
H-300			1/8" LET-LOK®	1/8" LET-LOK®	50.8	2.00	25.4	1.00	25.4	1.00	25.4	1.00	33.4	1.31							
H-395			1/8" MNPT	1/8" LET-LOK®	45.3	1.78	19.9	0.78	25.4	1.00	19.9	0.78	33.4	1.31							
H-300	4.4 (0.172)	0.37	1/4" LET-LOK®	1/4" LET-LOK®	58.8	2.31	29.4	1.16	29.4	1.16	29.4	1.16	37.3	1.47	10.0 (0.39")	7.95 (0.31")	35.1 (1.38") 50* (1.97")	13.0 (0.51")	63.5 (2.50") 56* (2.20")	15.9 (5/8")	10.0 (0.39")
H-300			6mm LET-LOK®	6mm LET-LOK®	58.8	2.31	29.4	1.16	29.4	1.16	29.4	1.16	37.3	1.47							
H-300			8mm LET-LOK®	8mm LET-LOK®	58.8	2.31	29.4	1.16	29.4	1.16	29.4	1.16	37.3	1.47							
H-310			1/8" FNPT	1/8" FNPT	41.2	1.62	20.6	0.81	20.6	0.81	20.6	0.81	28.5	1.12							
H-380			1/8" MNPT	1/8" MNPT	50.8	2.00	25.4	1.00	25.4	1.00	25.4	1.00	33.3	1.31							
H-380			1/4" MNPT	1/4" MNPT	50.8	2.00	25.4	1.00	25.4	1.00	25.4	1.00	33.3	1.31							
H-395			1/4" MNPT	1/4" LET-LOK®	54.8	2.16	25.4	1.00	29.4	1.16	25.4	1.00	37.3	1.47							
H-300	6.4 (0.25)	0.73	3/8" LET-LOK®	3/8" LET-LOK®	66.0	2.60	33.0	1.30	33.0	1.30	33.0	1.30	49.5	1.95	14.3 (0.56")	16.5 (0.65")	47.8 (1.88") 65* (2.56")	20.0 (0.79")	78.4 (3.09") 66.8* (2.63")	23.8 (15/16")	12.0 (0.49")
H-300			10mm C	10mm LET-LOK®	66.4	2.62	33.2	1.31	33.2	1.31	33.2	1.31	49.7	1.96							
H-300			1/2" LET-LOK®	1/2" LET-LOK®	71.6	2.82	35.8	1.41	35.8	1.41	35.8	1.41	52.3	2.06							
H-300			12mm LET-LOK®	12mm LET-LOK®	71.6	2.82	35.8	1.41	35.8	1.41	35.8	1.41	52.3	2.06							
H-310			1/4" FNPT	1/4" FNPT	54.0	2.12	27.0	1.06	27.0	1.06	27.0	1.06	43.5	1.71							
H-380			3/8" MNPT	3/8" MNPT	57.0	2.24	28.5	1.12	28.5	1.12	28.5	1.12	45.0	1.77							
H-385			1/4" MNPT	1/4" FNPT	58.5	2.30	31.5	1.24	27.0	1.06	28.5	1.12	43.5	1.71							
H-385			3/8" MNPT	3/8" FNPT	56.5	2.22	28.5	1.12	28.0	1.10	28.5	1.12	44.5	1.75							
H-395			3/8" MNPT	3/8" LET-LOK®	61.5	2.42	28.5	1.12	33.0	1.30	28.5	1.12	49.5	1.95							
H-300			3/4" LET-LOK®	3/4" LET-LOK®	97.0	3.82	48.5	1.91	48.5	1.91	48.5	1.91	68.5	2.70	19.5 (0.77")	20.0 (0.79")	47.8 (1.88") 65* (2.56")	26.0 (1.02")	105.6 (4.16") 94* (3.70")	30.2 (1-3/16")	22.0 (0.87")
H-310	9.5 (0.375)	1.8	3/8" FNPT	3/8" FNPT	76.2	3.00	38.1	1.50	38.1	1.50	38.1	1.50	58.1	2.29							
H-310			1/2" FNPT	1/2" FNPT	76.2	3.00	38.1	1.50	38.1	1.50	38.1	1.50	58.1	2.29							
H-310			3/4" FNPT	3/4" FNPT	36.0	3.78	48.0	1.89	48.0	1.89	-	-	-	-							
H-380			1/2" MNPT	1/2" MNPT	76.2	3.00	38.1	1.50	38.1	1.50	38.1	1.50	58.1	2.29							
H-380			3/4" MNPT	3/4" MNPT	76.2	3.00	38.1	1.50	38.1	1.50	-	-	-	-							
H-385			1/2" MNPT	1/2" FNPT	76.2	3.00	38.1	1.50	38.1	1.50	38.1	1.50	58.1	2.29							

Dimensions are for reference only, and are subject to change without notice.

* Dimensions for metal handle option

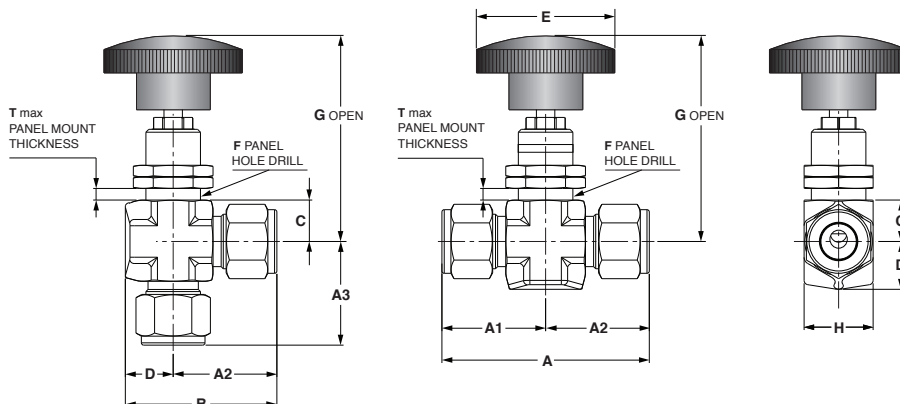


STEM OPTIONS

H-300U needle valves are available with a choice of stem tips:




8A Regulating:
Used where some degree of flow control is required.



8B V-Stem:
Standard stem tip used for the on/off operation in general-purpose liquids and gas service.




8C Non-Rotating Stem:
Typically used in high-cycle applications to extend valve life and prevent stem rotation inside the body tip, a suitable selection for gaseous high pressure applications.




Soft Seat Stem (PTFE)
A soft seat tip requires a lower seating torque than a metal stem tip; the best choice for clean gaseous high pressure applications; MAWT is 200°F (93°C).

FLOW DATA: FLOW COEFFICIENT VS. HANDLE TURNS

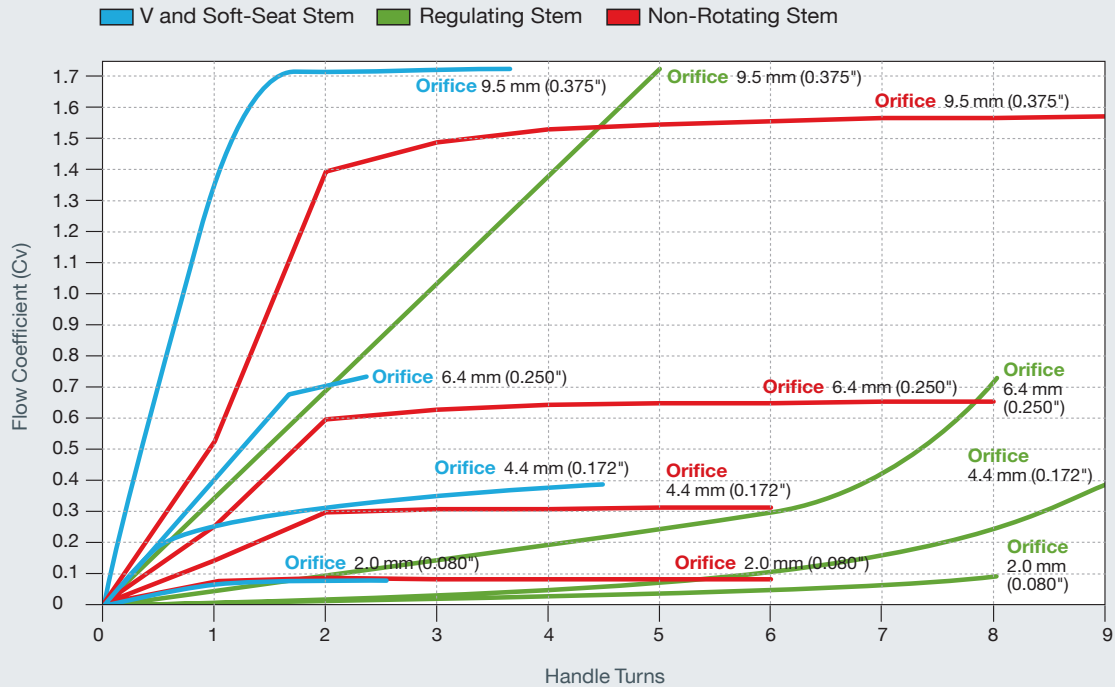

PRESSURE TEMPERATURE RATING

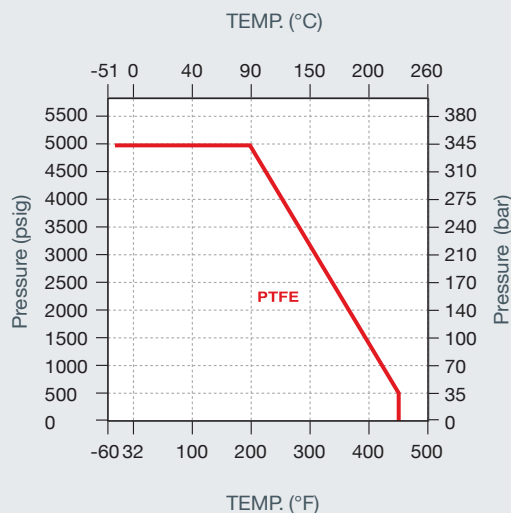

TECHNICAL DATA

The following table contains the temperature and pressure ratings for a standard valve with PTFE packing.

Body Material	Stem Type	Rating	
		Temperature	Pressure
316 St.St.	All St.St. Stems	-51°C to 230°C (-60°F to 446°F)	5000 psi
	PCTFE	-46°C to 93°C (-51°F to 200°F)	5000 psi
Brass	Regulating & V-Stem	-46°C to 200°C (-51°F to 392°F)	3000 psi
	PCTFE	-46°C to 93°C (-51°F to 200°F)	3000 psi

* Extreme temperature fluctuations may require packing adjustment.

Notes:

- The H-300U was designed for high pressure services where moderately uncontaminated media is used
- For steam applications, it is recommended to select one of Ham-Let severe service needle valves
- For oxygen applications, select the oxygen clean treatment option
- For relatively high pressure pure oxygen applications, assure that the selected valve is tested and found to meet the specific application requirements

CLEANING & PACKAGING

Every H-300U series needle valve is cleaned in accordance with Standard Cleaning and Packaging (procedure 8184). Oxygen Clean & Lubricant Free Cleaning and packaging, in accordance with Special Cleaning and Packaging (procedure 8185), is available as an option.

⚠ **Lubricant free cleaned valves have significantly higher actuation torque.**

TESTING


The H-300U Series Needle Valve design has been tested for Proof and Burst. Every H-300U Needle Valve is factory tested with nitrogen at 1000 psi (69 bar) for leakage through the packing and seat. The maximum allowable leakage across the seat is 0.1 std cc/min. No detectable leakage is allowed during shell test.

PACKING ADJUSTMENT

Due to the varied service applications of the valve, packing adjustment may occasionally be necessary. Packing is factory adjusted to 1000 psig service. See packing adjustment procedure No.3901882 on the website.

⚠ **Initial packing adjustment is recommended after installation and prior to start-up**

H-300U SERIES ORDERING INFORMATION

H-3 **00** - **SS** - **L** - **V** - **1/4** - **RS** - 

Valve Series

Valve Type

00	- LET-LOK® End
10	- Female End
15	- Female to Male End
80	- Male End
85	- Male to Female End
95	- Male to LET-LOK®

Body Material

SS	- 316SS
B	- Brass

End Connection

L	- LET-LOK®
N	- NPT
R	- ISO Tapered
NL	- NPT to LET-LOK®
HL	- Single Ferrule
G	- ISO Parallel
GL	- Face Seal Ends

Stem Designator

V	- V Stem
R	- Regulating Stem
K	- Soft Seat PCTFE Stem
NR	- Non-Rotating Stem

End Connection Size

1/8	3MM
1/4	6MM
3/8	8 MM
1/2	10MM
3/4	12MM

Handle Type


RS	-Black Plastic
RAS	-Black Aluminum
RAR	-Red Aluminum
RAB	-Blue Aluminum
RAG	-Green Aluminum
RAY	-Yellow Aluminum
M	-Metal Bar SS316

Pattern Designator

Blank	- Straight
A	- Angle

Treatment

Blank	- Standard Cleaning & Passivation
OC	- Oxygen Clean
LF	- Lubricant Free
SF	- Silicone Free



Spare Round-Handle Kits are available for each valve.

SPARE KITS

Series	End Size	Seal Kit*	Handle Kit**
H-380U	1/8, 1/4	Z-300U-SK-1/4-P	Z-300U-HK-1/4- <input type="checkbox"/>
	3/8	Z-300U-SK-1/2-P	Z-300U-HK-1/2- <input type="checkbox"/>
	1/2, 3/4	Z-300U-SK-3/4-P	Z-300U-HK-3/4- <input type="checkbox"/>
H-310U Female to Female	1/8	Z-300U-SK-1/4-P	Z-300U-HK-1/4- <input type="checkbox"/>
	1/4	Z-300U-SK-1/2-P	Z-300U-HK-1/2- <input type="checkbox"/>
	3/8, 1/2	Z-300U-SK-3/4-P	Z-300U-HK-3/4- <input type="checkbox"/>
H-395U Male to LET-LOK®	1/8, 1/4	Z-300U-SK-1/4-P	Z-300U-HK-1/4- <input type="checkbox"/>
	3/8	Z-300U-SK-1/2-P	Z-300U-HK-1/2- <input type="checkbox"/>
H-385U Male to Female	1/4	Z-300U-SK-1/2-P	Z-300U-HK-1/2- <input type="checkbox"/>
	3/8	Z-300U-SK-1/2-P	Z-300U-HK-1/2- <input type="checkbox"/>
	1/2	Z-300U-SK-3/4-P	Z-300U-HK-3/4- <input type="checkbox"/>
H-300U LET-LOK®	1/8, 1/4, 3MM, 6MM, 8MM	Z-300U-SK-1/4-P	Z-300U-HK-1/4- <input type="checkbox"/>
	3/8, 1/2, 10MM, 12MM	Z-300U-SK-1/2-P	Z-300U-HK-1/2- <input type="checkbox"/>
	3/4	Z-300U-SK-3/4-P	Z-300U-HK-3/4- <input type="checkbox"/>

*Seal Kit contains packing and packing instructions

**Handle Kit contains handle and set screw.

☐ Handle type per "How to Order"

Warning!

The system designer and user have the sole responsibility for selecting products suitable for their special application requirements, ensuring their safe and trouble-free installation, operation, and maintenance. Application details, material compatibility and product ratings should all be considered for each selected product. Improper selection, installation or use of products can cause property damage or personal injury.

H-300U | 2019_Rev00A

