

WDGMA3103x

Spring-loaded arm for encoder WDP 36A

for length determination



Product data

Highlights

- Variable installation from below, from above, horizontal, vertical
- Adjustable prestressing force: 5 N up to 20 N (in steps of 5 N)
- Can be combined with all measuring wheels of 200 mm circumference
- Available in two loading directions

Spring travel

contact pressure / spring travel:

0 N	= 28 mm
5 N	= 24 mm
10 N	= 20.2 mm
15 N	= 16.3 mm
20 N	= 12.5 mm

Gewicht

232 g

Order number(s)

WDGMA31031


Load direction anti-clockwise

WDGMA31032


Load direction clockwise

Drawings and STEP-Data

All dimensional specifications in mm

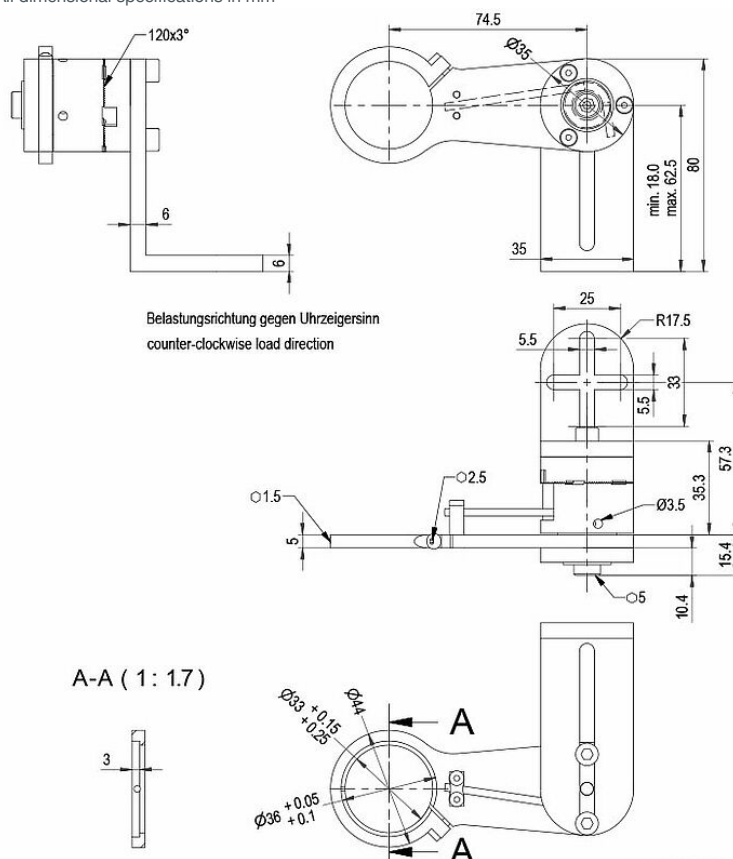

WDGMA31031

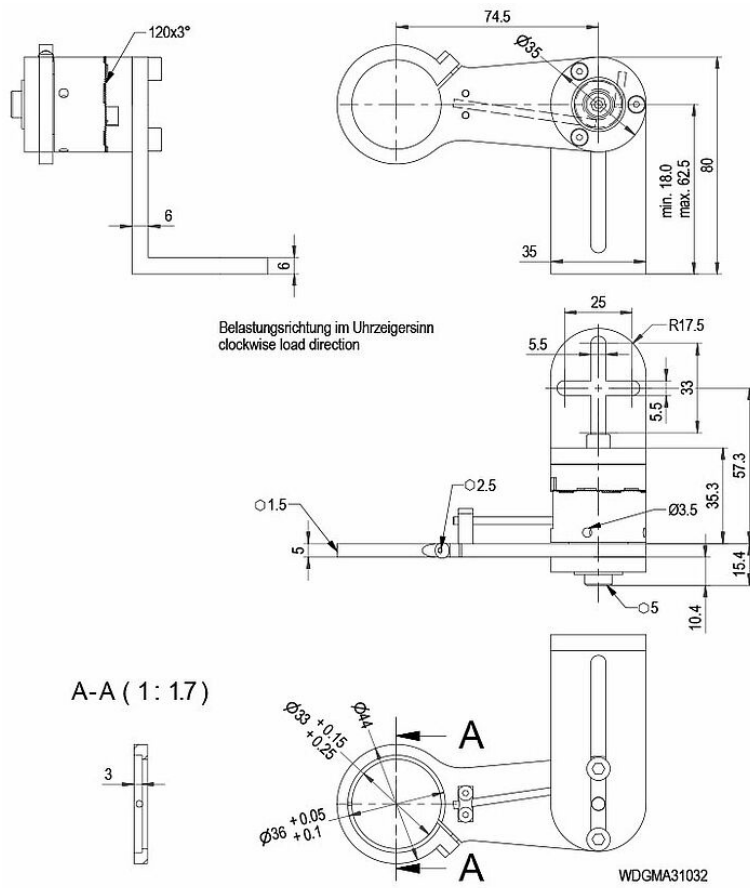

Wachendorff Automation GmbH & Co. KG - Industriestrasse 7 - D-65366 Geisenheim
wdg@wachendorff.de - Tel +49 6722 996525 - Fax +49 6722 996570